

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number  
**WO 2004/003445 A1**

(51) International Patent Classification<sup>7</sup>: **F25D 23/06**

[US/US]; 1775 Meadow Grove, St. Joseph, MI 49085 (US). MARTINELLA, Luigi [IT/IT]; Via Risorgimento 127, I-28823 Ghiffa (IT). GIUDICI, Giorgio [IT/IT]; Via Fiume 6, I-21015 Lonate Pozzolo (IT).

(21) International Application Number:  
PCT/EP2003/006864

(22) International Filing Date: 27 June 2003 (27.06.2003)

(74) Agent: GUERCI, Alessandro; Whirlpool Europe S.r.l., V. le G. Borghi 27, I-21025 Comerio (IT).

(25) Filing Language: English

(26) Publication Language: English

(81) Designated States (*national*): BR, CA, CN, CZ, IN, JP, KR, MX, NZ, PL, RU, US, ZA.

(30) Priority Data:  
02014062.0 1 July 2002 (01.07.2002) EP

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments


(71) Applicant (*for all designated States except US*):  
**WHIRLPOOL CORPORATION** [US/US]; 2000 M  
63, Benton Harbor, MI 49022 (US).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **KIRBY, David**

(54) Title: A VACUUM INSULATED REFRIGERATOR CABINET AND METHOD FOR ASSESSING THERMAL CONDUCTIVITY THEREOF

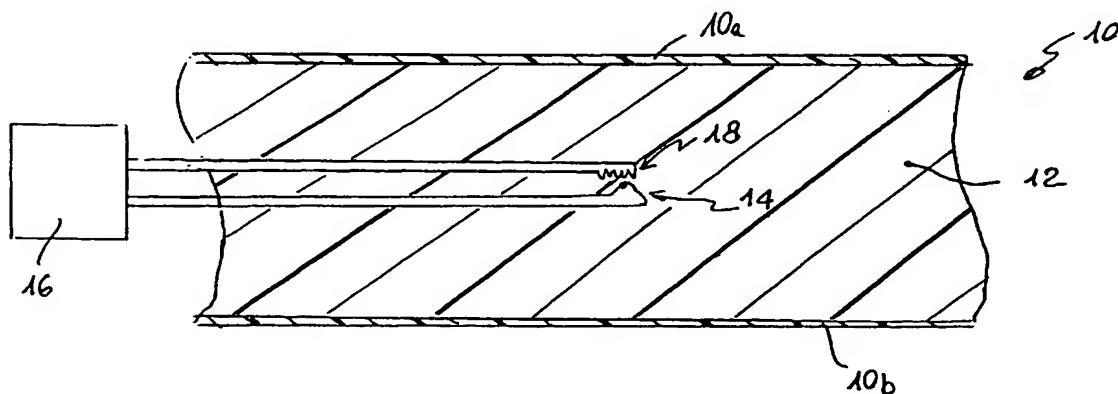

(57) Abstract: A vacuum insulated refrigerator cabinet comprises an evacuation system for evacuating an insulation space (10, 12) of the cabinet when pressure inside such space is higher than a predetermined value. The cabinet presents sensor means comprising a temperature sensor (14) and a heater (18) both located within the insulation space (10, 12) and a control system (16) for activating the heater (18) according to a predetermined heating cycle and for receiving a signal from the temperature sensor (14), such control system being able to provide the evacuation system with a signal related to the insulation level within the insulation space.

WO 2004/003445 A1

**THIS PAGE BLANK (USPTO)**

11/10/03  
A VACUUM INSULATED REFRIGERATOR CABINET AND METHOD FOR  
ASSESSING THERMAL CONDUCTIVITY THEREOF

The present invention relates to a vacuum insulated refrigerator cabinet comprising an evacuation system for evacuating an insulation space of the cabinet when pressure inside such space is higher than a predetermined value.

With the term "refrigerator" we mean every kind of domestic appliance in which the inside temperature is lower than room temperature, i.e. domestic refrigerators, vertical freezers, chest freezer or the like. A vacuum insulated cabinet (VIC) for refrigeration can be made by building a refrigeration cabinet that has a hermetically sealed insulation space and filling that space with a porous material in order to support the walls against atmospheric pressure upon evacuation of the insulation space. A pump system may be needed to intermittently re-evacuate this insulation space due to the intrusion of air and water vapour by permeation. A solution of providing a refrigerator with a vacuum pump running almost continuously is shown in EP-A-587546, and it does increase too much the overall energy consumption of the refrigerator. It is advantageous for energy consumption to re-evacuate only when actually needed. Therefore there is in the art the need of a simple and inexpensive insulation measurement system that would be applicable to operate a refrigerator cabinet vacuum pump or similar evacuation system only when actually needed.

The present invention provides a vacuum insulated refrigerator cabinet having such insulation measurement system, according to the appended claims.

According to the invention the measurement system is a system that measures the insulating value of the VIC insulation. A non-equilibrium measuring approach is taken that requires only one temperature sensor. This sensor is buried in the evacuated insulation material, preferably in a central position thereof with reference to the thickness of the insulation space. At a central position within the insulation space, the disturbances from transients in external surface temperature are minimised. However, the

sensor device may be placed in any portion of the vacuum space, but with likely complications due to the transients in external surface temperature. It is also possible to place the sensor device on an external portion of evacuated insulation that is connected by a conduit to the main vacuum insulation chamber, mainly in order to facilitate the mounting of the sensor device. In immediate proximity to the sensor is a heat source that can be pulsed. The thermal pulse is controlled to a small, precise amount of thermal energy. The insulation and the temperature sensor, in the immediate area of the thermal pulse, will show a temporary increase in temperature. The effective thermal conductivity, heat capacity and density of the surroundings of the thermal pulse control the decay of the increase in temperature. Heat capacity and density are expected to remain constant over the life of the refrigerator, but the thermal conductivity will increase due to the deterioration of vacuum level in the insulation. An analysis of the decay will produce a measure of thermal conductivity and allow a criterion for pumping to be applied. Due to the fact that this device is centrally located in the insulation, relieves the problems of outside temperature variations. At any rate it is possible to apply the device to the external wall of the insulation space and protect it with an insulating pad. After calibration, this device may just have to record one temperature at a specified time after the application of the temperature pulse for use as the pumping criterion. The invention will now be explained in greater detail with reference to drawings, which show:

- Figure 1 is a schematic cross-view of a wall of a vacuum insulated cabinet according to the invention; and
- Figure 2 is a schematic diagram showing the relationship between the temperature measured in the proximity of the heat source and the time, in two different conditions of thermal conductivity.

With reference to the figures, a refrigerator cabinet comprises an insulated double wall 10 comprising two relatively gas impervious walls 10a (liner) and 10b (wrapper) filled with an evacuated porous insulation material 12. Both liner 10a and wrapper 10b may be of polymeric material. The insulation material 12 can be an inorganic powder such as silica and alumina,

inorganic and organic fibers, an injection foamed object of open-cell or semi-open-cell structure such as polyurethane foam, or a open celled polystyrene foam that is extruded as a board and assembled into the cabinet. The insulation material 12 is connected to a known evacuation system (not shown) that can be a physical adsorption stage (or more stages in series) or a mechanical vacuum pump or a combination thereof.

According to the invention, inside the insulation material 12 of the double wall 10 it is buried a temperature probe 14 connected to a control unit 16. In the proximity of the temperature probe 14, at a close distance therefrom, it is buried an electric heater 18 also connected to the control unit 16. The control unit 16 is linked to the system (not shown) for evacuating the insulation material 12.

According to a second embodiment of the invention, it is possible to use a heated wire as the thermal source and then measure the temperature decay in the wire by using the same wire as a resistance thermometer.

In order to assess the performances of the insulation material, the control unit 16 switches on the electric heater 18 for a short period, typically of 1-10 s, and with switching interval preferably comprised between 1 and 30 days. At the same time, the temperature probe 14 measures the sudden increase of temperature around the heater 18, and the following decay when the heater is switched off. The heater is switched on and off according to a predetermined pulse pattern, whose time interval between pulses may vary broadly according to the insulation material 12, its width, the material of the liner 10a and wrapper 10b and thickness thereof. The decay of temperature (figure 2) is highly influenced by the pressure inside the VIC insulation, and therefore by actual thermal conductivity of insulation material 12. In the left portion of figure 2 it is shown an example of temperature decay when the thermal conductivity  $\lambda$  is low (low pressure), while in the right portion of figure 2 it is shown an example of temperature decay when the thermal conductivity  $\lambda$  has increased due to an increase of pressure inside the material 12, for instance after some days from the last intervention of the vacuum pump. If at a predetermined time K the temperature is lower than a threshold value T, then it is time for the control unit 16 to switch on the

vacuum pump in order to re-establish the correct performances of the refrigerator. Of course the control unit 16 may also assess when for a predetermined temperature, the time for reaching such temperature is shorter than a threshold value. From the above description it is clear that it is not necessary to detect how the temperature measured by the sensor 14 changes with time, since it is needed to record one temperature only at a predetermined time after the temperature pulse.

The general energy conservation equation for the heat diffusion through a solid medium, in the case of the sensor system according to the present invention, can be approximated as one-dimensional due to the geometric characteristic of domestic refrigerator walls, where one of the dimensions (thickness) is usually much smaller than the other two (height and width). Also, although the thermal conductivity  $k$  varies with time, it is not a function of position (spatially invariable), that reduces the equation for heat diffusion to:

$$k \times \frac{\partial^2 T}{\partial x^2} + q'' = \rho \times c \times \frac{\partial T}{\partial t} \quad (1)$$

where  $T$  is the temperature,

$t$  is time,

$x$  is the distance measured across the vacuum wall thickness,

$k$  is the thermal conductivity,

$q''$  is the energy generated inside the wall,

$\rho$  is density,

and  $c$  is the specific heat of the vacuum insulation.

The equation (1) may have several different solutions, depending on the boundary and initial conditions attributed to the dependent variable  $T$ , the expression for  $q''$ , etc.,

In general, the form of these solutions can be very complex, and for some cases we have to rely on numerical techniques in order to seek the solution for the temperature variation along the time. From computational simulation

of the temperature evolution as a function of time it is immediately evident that the largest the thermal conductivity "k", the steepest the temperature decay.

Due to being located preferably in the centre of the refrigerator insulated wall and because of the thermal capacitance of the vacuum insulation transient, short term changes in the surrounding conditions will be smoothed out and won't affect the "temperature *versus* time" measured by the temperature probe.

Due to this, the measuring device is practically insensitive to:

- door opening,
- internal temperature switching due to compressor cycling.

Both external (ambient variations) as internal temperature changes (different thermostat set-up) may produce small changes in the probe reading, at some pre-determined time after the pulse heater is switched on. Therefore it is preferred to keep track of internal and external temperatures and feed this information into the logic to control the vacuum pump switching on/off, along with the built-in probe reading.

In view of the above, it is preferred to use thermistors for temperature measurement with accuracy better than 0.2 °C. Moreover, it is also preferred to keep track of ambient and internal temperatures, and this information used to "calibrate" the temperature measured according to the present invention.

## CLAIMS

1. A vacuum insulated refrigerator cabinet comprising an evacuation system for evacuating an insulation space (10, 12) of the cabinet when pressure inside such space is higher than a predetermined value, characterised in that it presents sensor means comprising a temperature sensor (14) and a heater (18) both located in a portion of the evacuation system (10, 12) and a control system (16) for activating the heater (18) according to a predetermined heating cycle and for receiving a signal from the temperature sensor (14), such control system being able to provide the evacuation system with a signal related to the insulation level within the insulation space.
2. A vacuum insulated refrigerator cabinet according to claim 1, characterised in that the temperature sensor (14) and the heater (18) are both located within the insulation space (10, 12).
3. A vacuum insulated refrigerator cabinet according to claim 1 or 2, characterised in that the temperature sensor (14) and the heater (18) are the same wire used either for heating purpose or for temperature measurement.
4. A vacuum insulated refrigerator cabinet according to any of the preceding claims, characterised in that the temperature sensor (14) and the heater (18) are placed centrally in the insulation space (10, 12)
5. A vacuum insulated refrigerator cabinet according to any of the preceding claims, characterised in that the heating cycle of the heater (18) comprises a series of heating pulses.
6. Method for assessing the thermal conductivity of an insulation space (10, 12) of a vacuum insulated refrigerator cabinet, characterised in that it comprises the steps of providing a predetermined amount of heat inside the insulation space (10, 12), and measuring temperature in the proximity of the zone where heat has been provided in order to have an indication on how temperature decreases in such zone, the faster being the decrease vs. time, the higher being thermal conductivity of the insulation space.



7. Method according to claim 3, characterised in that heat is provided inside the insulation space in a series of pulses.

**THIS PAGE BLANK (USPTO)**

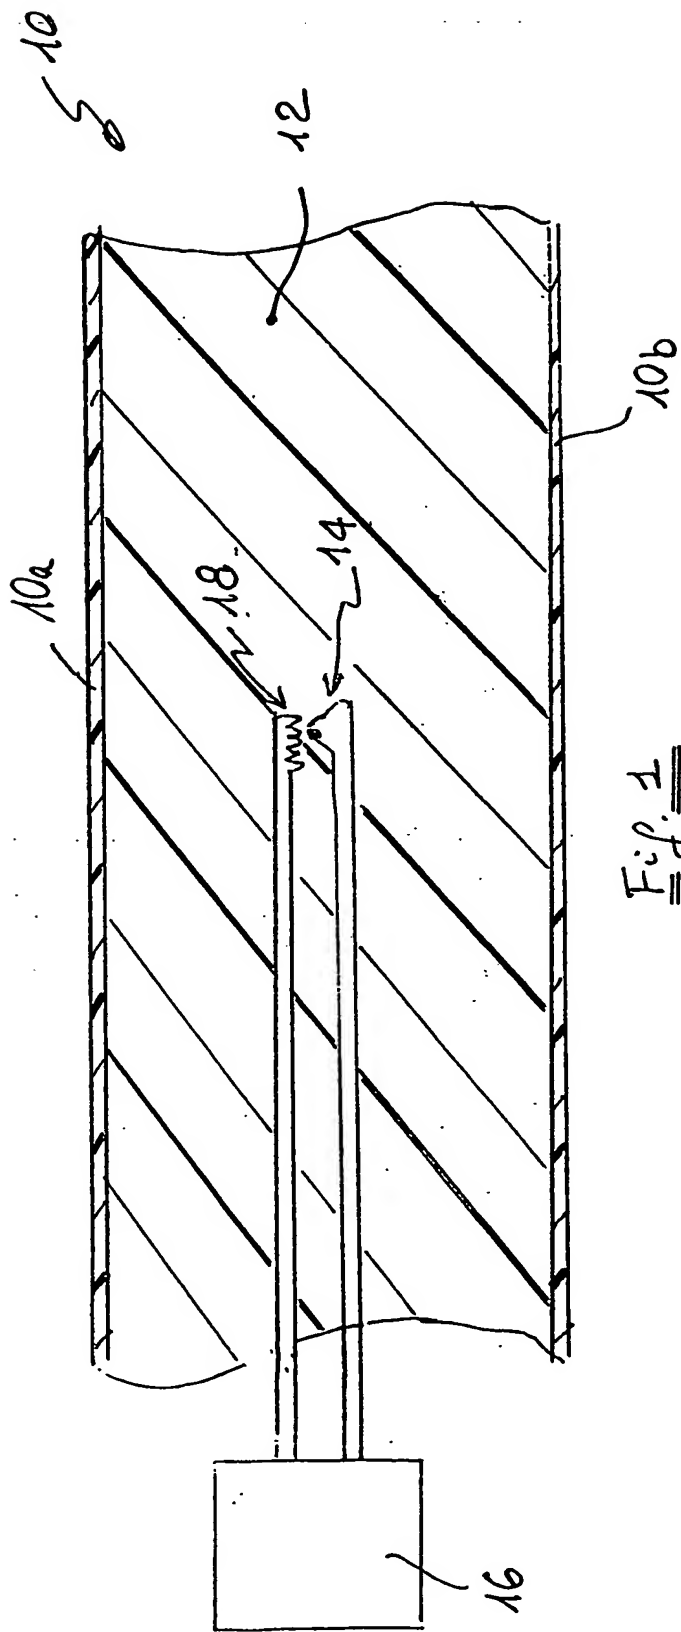


Fig. 1

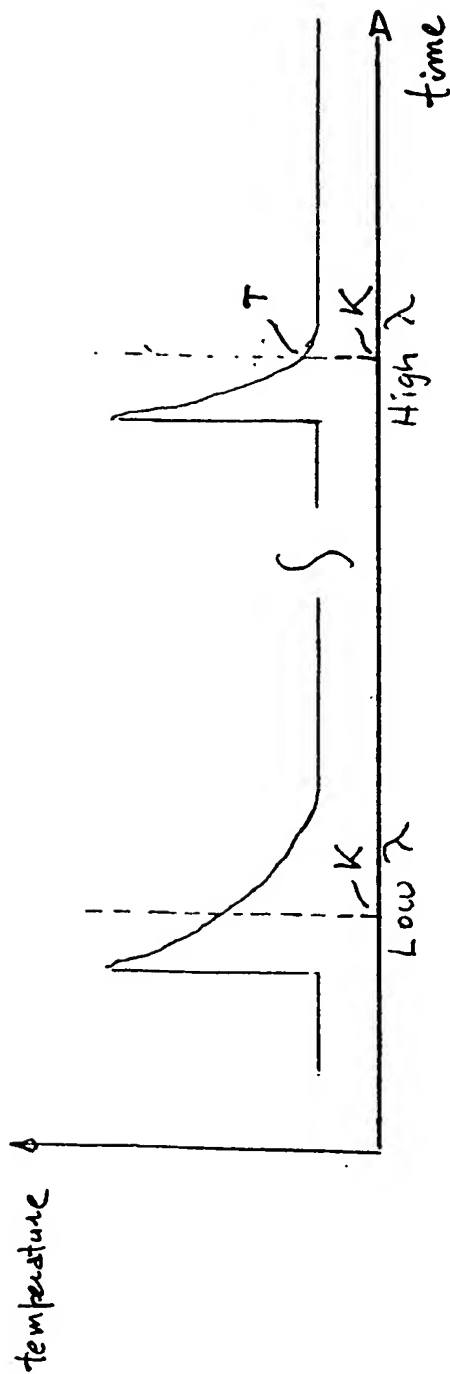


Fig. 2

**THIS PAGE BLANK (USPTO)**

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 03/06864

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F25D23/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F25D G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 633 420 A (GETTERS SPA) 11 January 1995 (1995-01-11) column 8, line 4 - line 22; figure 2	1,6
A	PATENT ABSTRACTS OF JAPAN vol. 008, no. 105 (P-274), 17 May 1984 (1984-05-17) & JP 59 015845 A (TOUYOU SANSEI KK), 26 January 1984 (1984-01-26) abstract	1,6
A	US 5 038 304 A (BONNE ULRICH) 6 August 1991 (1991-08-06) column 3, line 15 - column 5, line 15 column 8, line 53 - line 60; figures 1,12	1,5,6
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*G\* document member of the same patent family

Date of the actual completion of the international search

17 November 2003

Date of mailing of the international search report

03/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Jessen, F

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/06864

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 622 430 A (PLETKA HANS D ET AL) 22 April 1997 (1997-04-22) column 7, line 4 -column 8, line 6; figure 1 ----	1,6
A	FR 1 454 539 A (RECH S SCIENT ET IND E R S I E) 11 February 1966 (1966-02-11) page 1, column 2, line 17 -page 3, column 2, line 3; figure 1 ----	1,6
A	DE 100 06 878 A (SCHOLZ FLORIAN) 6 September 2001 (2001-09-06) column 4, line 20 -column 5, line 54; figures 1,2 -----	1,6

# INTERNATIONAL SEARCH REPORT


Information on patent family members -

International Application No

PCT/EP 03/06864

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0633420	A	11-01-1995	IT 1264692 B1 AT 151157 T CA 2126815 A1 CN 1103151 A ,B DE 69309453 D1 DE 69309453 T2 EP 0633420 A2 ES 2101281 T3 JP 7145778 A RU 2120686 C1 US 5625742 A	04-10-1996 15-04-1997 09-01-1995 31-05-1995 07-05-1997 10-07-1997 11-01-1995 01-07-1997 06-06-1995 20-10-1998 29-04-1997
JP 59015845	A	26-01-1984	NONE	
US 5038304	A	06-08-1991	DK 312489 A EP 0348243 A2 JP 3094150 A	25-12-1989 27-12-1989 18-04-1991
US 5622430	A	22-04-1997	DE 4337840 A1 EP 0652434 A2 JP 7209221 A	11-05-1995 10-05-1995 11-08-1995
FR 1454539	A	11-02-1966	NONE	
DE 10006878	A	06-09-2001	DE 10006878 A1 WO 0161118 A1 EP 1255898 A1 JP 2003529000 T US 2003046894 A1	06-09-2001 23-08-2001 13-11-2002 30-09-2003 13-03-2003

**THIS PAGE BLANK (USPTO)**

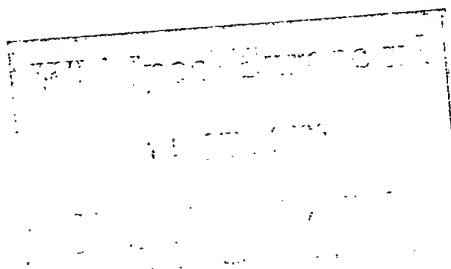



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**